

RoHS Compliant and Pb-Free Product  
Package: S18

### Features

- Frequency Range: 5 MHz to 1200MHz
- Low Cost and RoHS Compliant
- Industry Standard SMT package
- Available in Tape-and -Reel
- 75Ω Characteristic Impedance



### Product Description




The RFCP5762 Transformer is designed for applications that require small, low cost, and highly reliable surface mount components. Applications may be found in broadband, wireless, and other communications systems. These units are built Lead-Free and RoHS compliant. S-Parameters are available on request.




### Specifications

| Parameter         | Specification |      |      | Unit |
|-------------------|---------------|------|------|------|
|                   | Min.          | Typ. | Max. |      |
| Frequency Range   | 5             |      | 1200 | MHz  |
| Nominal Coupling  | 15.5          | 16.0 | 16.5 | dB   |
| Coupling Flatness | -0.5          |      | +0.5 | dB   |
| Insertion Loss    |               | 0.6  | 1.2  | dB   |
| Directivity       | 10            | 20   |      | dB   |
| Return Loss       | 14            | 17   |      | dB   |
| Nominal Impedance | 75            |      |      | Ω    |

Note: Typical values represent Mid-band performance at 25 °C.

### Schematic

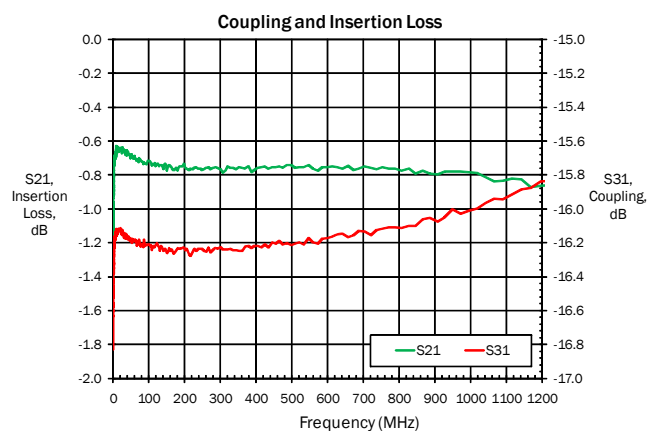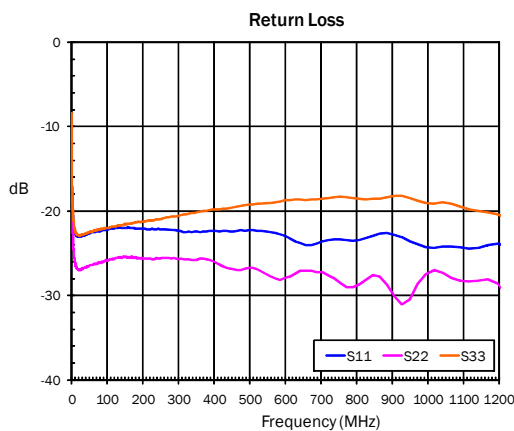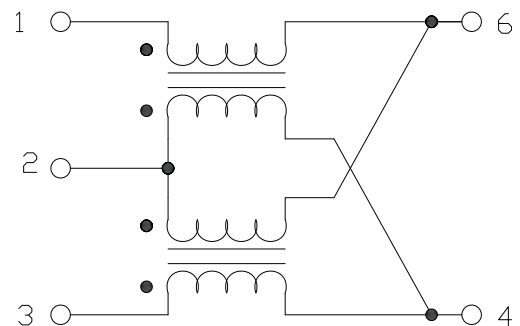


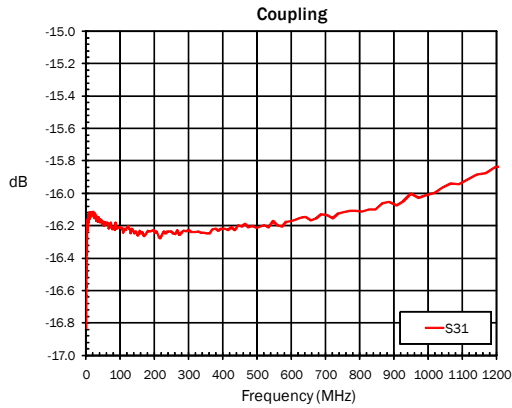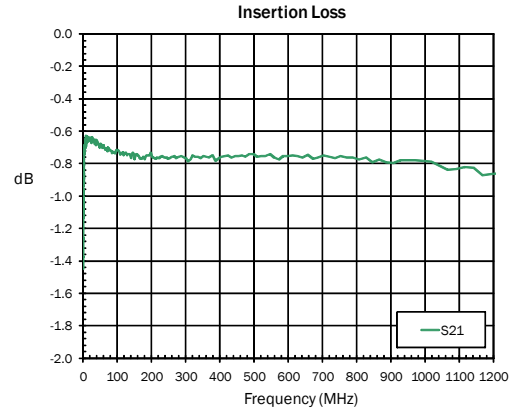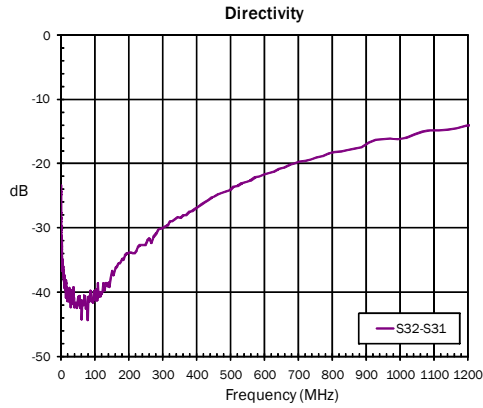

### Pin Out

| Pin | Name       |
|-----|------------|
| 1   | Input      |
| 2   | Ground     |
| 3   | Coupled    |
| 4   | Terminated |
| 5   | NC         |
| 6   | Output     |

### Package Drawing - S18

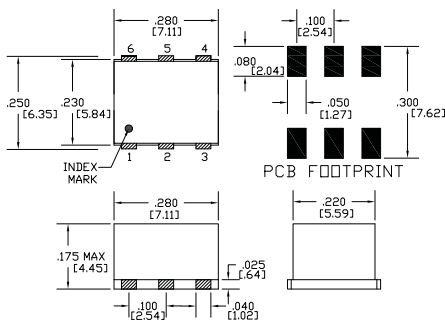

### Absolute Maximum Ratings

| Parameter             | Rating      | Unit |
|-----------------------|-------------|------|
| RF Power              | 2           | W    |
| Operating Temperature | -40 to +85  | °C   |
| Storage Temperature   | -40 to +100 | °C   |

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EUDirective2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by MiniRF, Inc. ("MiniRF") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of MiniRF. MiniRF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.